

# MA Series

## MTR-80/MTR-150

### FOUR CHANNEL LINE TRANSFORMER

MTR-150

FOUR CHANNEL 100/70V LINE TRANSFORMER




**MTR 150/80** boxes are ideally suited as an accessory option for the Altair MA series multichannel amplifiers in 70 or 100 Volts P.A. line distributed audio applications. Each box contains four high quality, low LF distortion transformers. Special wound technics and high grade core materials ensures an extended low frequency operation down to 50 Hz at full power. Transient response is excellent, allowing the use in high performance music and speech applications.

#### FEATURES:

- ❖ Special ears design allows front or rear rack banana panel position.
- ❖ Passive, stand alone construction.
- ❖ High bandwidth music quality, transformer design.
- ❖ BANANA Output connectors. Simple and visual set-up.
- ❖ 4 CHANNELS compact unit.

#### Connection panel

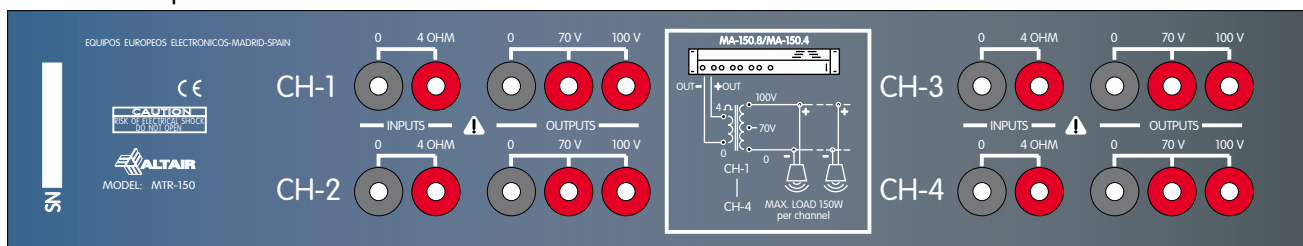

### TECHNICAL SPECIFICATIONS

#### BANDWIDTH

50 Hz to 20 KHz (0, -1 dB)

#### THD +N

<0,05% from 45 Hz to 20 KHz

#### INPUT/OUTPUT (x4)

MTR-80: IN 18 V // OUTS: 70 and 100V line 80 WATT  
MTR-150: IN 25 V // OUTS: 70 and 100V line 150 WATT

#### CROSSTALK

Better than 90 dB at 1 KHz

#### DIMENSIONS

483x89x220 m/m (19"x2U), including connectors.

#### CONNECTIONS

Heavy Duty dual binding posts.

#### NETT/SHIPPING WEIGHT

MTR-80 /MTR-150 11 Kg/14Kg

Specifications subject to change without notice.



[www.altiraudio.com](http://www.altiraudio.com)

EQUIPOS EUROPEOS ELECTRONICOS